




Product Overview

EKM8 series offers a range of molded case circuit breakers with fixed thermal magnetic trip units, providing both line and motor protection. These MCCB are suitable for use with AC 50Hz, rated voltage of 690V and below, and rated current up to 2000A.

- Frame size: 125A, 160A, 250A, 400A, 630A, 800A, 1250A, 2000A
- Rated operational voltage Ue (V/AC): 230/400/415/690
- Breaking capacity code: C, S, H
- Number of poles: 1P, 2P, 3P, 4P
- Trip unit type: thermal magnetic type
- Installation method: Fixed type; plug-in type

Nameplate Interpretation

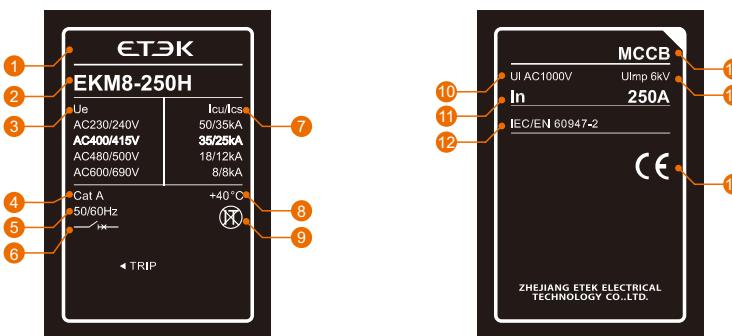

- ① Company LOGO
- ② Product model
- ③ Ue: Rated operational voltage
- ④ CatA: Utilization category of breaker
- ⑤ Frequency of A.C.
- ⑥ Electrical symbol for circuit breaker with isolating function
- ⑦ Icu/Ics: Ultimate short circuit breaking capacity/Service short circuit breaking capacity

- ⑧ +40°C: Ambient temperature
- ⑨ Not applicable to IT systems
- ⑩ Ui: Rated insulation voltage
- ⑪ In: Rated operational current
- ⑫ The product is in conformity with standard IEC/EN 60947.2
- ⑬ Molded Case Circuit Breaker
- ⑭ Uimp: Rated impulsive withstand voltage
- ⑮ CE certification

Comparison Table of Frame Sizes and Rated Current

Rated current(A)	10	16	20	25	32	40	50	63	80	100	125	160	180	200	225	250	315	350	400	500	630	700	800	1000	1250	1500	1600	2000	
Frame size(A)	125																												
125																													
160																													
250																													
400																													
630																													
800																													
1250																													
2000																													

Comparison Table of Frame size, Number of Poles and Breaking Capacity

Frame size(A)		125				160				250				400				630				800				1250				2000			
Number of poles		1P	2P	3P	4P	2P	3P	4P	3P	4P	3P	4P																					
Code of breaking capacity	C	■	■	■	■	■	■	■	■	■																							
	S	■	■	■	■	■	■	■	■	■																							
	H	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■			

Thermal and Magnetic Trip Unit

Protection

The circuit breaker equipped with TM thermomagnetic release is mainly for protection of the cable, which is on the power distribution system for transformer power supply.

Overload protection: thermal protection I_r (Fixed)

The overload protection function provides inverse time limit curve on the basis of bimetal. If the limit is exceeded, the deformation of the bimetal can lead in the tripping of the circuit breaker operating mechanism.

Test No.	I/In	Conventional time	Breaker status	Initial status
1	1.05	> 1h($I_n \leq 63A$) > 2h($I_n > 63A$)	Non-tripping	Cold status
2	1.3	$\leq 1h(I_n \leq 63A)$ $\leq 2h(I_n > 63A)$	Tripping	Immediately after test 1

Short circuit protection: magnetic protection I_i (Fixed)

Magnetic protection achieves short circuit protection through a magnetic trip device. The circuit breaker will trip instantaneously. I_i set at $10I_n$.

Test No.	I	Breaker status	Conventional time
1	80% I_i	Non-tripping	$\geq 0.2s$
2	120% I_i	Tripping	$\leq 0.2s$

Magnetic

The circuit breaker equipped with magnetic release is mainly for protection of the motor.

Short circuit protection: magnetic protection I_i (Fixed)

Magnetic protection achieves short circuit protection through a magnetic trip device. The circuit breaker will trip instantaneously. I_i set at $12I_n$.

Test No.	I	Breaker status	Conventional time
1	80% I_i	Non-tripping	$\geq 0.2s$
2	120% I_i	Tripping	$\leq 0.2s$

MCCB Selection Code

Product code	Frame size code	Breaking capacity code	Operation way code ①	Number of poles code	Trip unit type code	Inner accessories code ②
EKM8 -	160	H	P1	/ 4	3	00
EKM8 Series thermal magnetic fixed molded case circuit breaker	125: 125A 160: 160A 250: 250A 400: 400A 630: 630A 800: 800A 1250: 1250A 2000: 2000A	C: Basic type S: Standard type H: High breaking type	No code: Direct operation P1: DC3 electric operation P2: DC6 series electric operation ZY1: Turning handle (hand-operated center type-round handle)-(Preferred for conventional factory) ZF1: Turning handle (hand-operated center type-square handle) ZY2: Turning handle (hand-operated eccentric type-round handle) ZF2: Turning handle (hand-operated eccentric type-square handle) Z3: Turning handle (Hand-operated one-piece type) (Only available for 125, 160, 250)	1: 1P 2: 2P 3: 3P 4: 4P	2: Only electromagnetic detent 3: Thermal + Electromagnetic release	See accessory table

Note: ① 1P, 2P products have direct operation only.

The voltage of electric operation is divided into: DC24, DC110V, DC220V, AC230V, AC400V; Conventional production is AC230V.

② 125: 1P products without internal accessories;

Conventional factory default is the lead type: wire length 500mm (other lengths need to be customized);

Can be customized terminal type; undervoltage accessories are only terminal type.

Usage code ③	Product with N pole the code is selectable	Additional functionality code	Mounting and wiring options code ④	Protective accessories code ⑤	Rated current
2	B	VI /	P	Z	In=100A
No code: distribution protection	A: There is no over-current protection at pole N and the N pole is always connected. B: There is no over-current protection at pole N and N-pole operates with other three poles.	No code : Conventional products V: Low temperature rise model 50K	No designation : Front panel wiring (fixed type) P: Coupling row (extended copper row) Z1: Rear connection (fixed type) Z2Q: Plug-in front connection (split type) Z2H: Plug-in rear connection (split type) Z3Q: Plug-in front connection (one-piece)	No code: General products	125: 10,16,20,25, 32,40,50,63,80,100, 125A 160: 16,20,25,32,40, 50,63,80,100,125, 160A 250: 100,125,160, 180,200,225,250A 400: 250,315,350, 400A
2: motor protection	C: There is over-current protection at pole N and N-pole operates with other three poles. D: There is over-current protection at pole N and the N pole is always connected.	VI: Low temperature rise model 40K	Z3H: Plug-in rear connection (one-piece) DF: Draw-out type front connection DR: Draw-out type rear connection K: Connection frame type JK: Inlet only: Connection frame type CK: Outlet only : Connection frame type	Z: Terminal cover	630: 400,500,630A 800: 500,630,700, 800A 1250: 800,1000, 1250A 2000: 1000,1250, 1500,1600,2000A

③ ≤40A 8.5In does not act, 500A action; 700A -2000A no motor protection type.

④ 1P, 2P only connection row, behind the board wiring; 125, 160, 250 no pull-out; 125 no 4P plug-in (split); 1250, 2000 with coupling row only.

⑤ Terminal cover is only available for 3P;

400 and 630 are divided into narrow and long models, and wide and long models, and the default is wide and long models; 125 and 2000 are not available at the moment.

Technical Parameters

Frame size Inm(A)		125			160			
Rated operational current In(A)		10,16,20,25,32,40,50,63,80,100,125A			16,20,25,32,40,50,63,80,100,125,160A			
Rated insulation voltage Ui(V)		1000V			1000V			
Rated impulse withstand voltage Uimp(kV)		8kV			8kV			
Rated operational voltage Ue(V), AC 50/60Hz		230V(1P); 240V(3P/4P); 400V(2P/3P/4P); 690V(3P/4P)			230V; 400V; 690V			
Breaking capacity code		C	S	H	C	S	H	
Number of poles		1P,2P,3P,4P			2P,3P,4P		3P,4P	
Rated service short circuit breaking capacity Ics (kA)	230/240V	10	18	25	20	28	35	
	400/415V	7.5	15	18	10	18	25	
	600/690V	3	4	8	4	4	8	
Rated ultimate short circuit breaking capacity Icu (kA)	230/240V	15	25	35	30	40	50	
	400/415V	10	18	25	15	25	35	
	600/690V	5	6	8	6	8	8	
Standards		IEC 60947-2			IEC 60947-2			
Utilization category		A			A			
Isolation function		■			■			
Trip unit type		Thermo magnetic			Thermo magnetic			
Mechanical life (times)		8500			8500			
Electrical life (times)		1500			1500			
Poles		1P	2P	3P	4P	2P	3P	4P
Inner accessories	Alarm contact	-	-	■	■	-	■	■
	Shunt release	-	■	■	■	■	■	■
	Shunt release + Alarm contact	-	-	■	■	-	■	■
	Single auxiliary contact	-	■	■	■	■	■	■
	Dual auxiliary contacts	-	■	■	■	■	■	■
	Single auxiliary contact + Alarm contact	-	-	■	■	-	■	■
	Dual auxiliary contacts + Alarm contact	-	-	■	■	-	■	■
	Under voltage release	-	■	■	■	■	■	■
	Under voltage release + Alarm contact	-	-	■	■	-	■	■
	Shunt release + Single auxiliary contact	-	-	■	■	-	■	■
	Shunt release + Dual auxiliary contacts	-	-	■	■	-	■	■
	Shunt release + Auxiliary alarm	-	-	■	■	-	■	■
	Shunt release + Under voltage release	-	-	■	■	-	■	■
	Two sets of single auxiliary contacts	-	-	■	■	-	■	■
	Single auxiliary contact + Dual auxiliary contacts	-	-	■	■	-	■	■
	Two sets of dual auxiliary contacts	-	-	■	■	-	■	■
	Single auxiliary contact + Auxiliary alarm	-	-	■	■	-	■	■
	Dual auxiliary contact + Auxiliary alarm	-	-	■	■	-	■	■
External accessories	Under voltage release + Single auxiliary contact	-	-	■	■	-	■	■
	Under voltage release + Dual auxiliary contact	-	-	■	■	-	■	■
	Under voltage release + Auxiliary alarm	-	-	■	■	-	■	■
	Motor-driven mechanism	-	-	■	■	-	■	■
	Manual operational mechanism	-	-	■	■	-	■	■
	Extended copper row	■	■	■	■	■	■	■
	Mechanical interlocking	-	-	■	■	-	■	■
	Plug-in front connection split type	-	-	■	■	-	■	■
	Plug-in front connection one-piece	-	-	■	■	-	■	■
	Plug-in front connection fixed type	-	-	■	■	-	■	■
	Plug-in rear connection split type	-	-	■	■	-	■	■
	Plug-in rear connection one-piece	-	-	■	■	-	■	■
	Plug-in rear connection fixed type	-	-	■	■	-	■	■
	Draw-out type rear connection	-	-	-	-	-	-	-

EKM8 MCCB 125AF~2000AF




Thermal Magnetic Fixed MCCB

Standard_ IEC60947-2

250			400	630	800	1250	2000
100,125,140,160,180,200,225,250A		250,315,350,400A	400,500,630A	500,630,700,800A	630,700,800,1000,1250A	1000,1250,1600,2000A	
1000V		1000V	1000V	1000V	1000V	1000V	1000V
8kV		8kV	8kV	8kV	8kV	8kV	8kV
230V; 400V; 690V		400V; 690V	400V; 690V	400V; 690V	400V; 690V	400V; 690V	400V; 690V
C	S	H	H	H	H	H	H
3P,4P			3P,4P	3P,4P	3P,4P	3P,4P	3P,4P
20	28	35	50	50	60	60	85
10	18	25	35	35	50	50	50
4	4	8	10	10	15	15	25
30	40	50	75	75	85	85	100
15	25	35	50	50	65	65	85
6	8	8	10	10	15	15	25
IEC 60947-2			IEC 60947-2	IEC 60947-2	IEC 60947-2	IEC 60947-2	IEC 60947-2
A		A	A	A	A	A	A
■		■	■	■	■	■	■
Thermo magnetic		Thermo magnetic	Thermo magnetic	Thermo magnetic	Thermo magnetic	Thermo magnetic	Thermo magnetic
7000		4000	4000	2500	2500	2500	2500
1000		1000	1000	500	500	500	500

Current-Temperature Characteristics

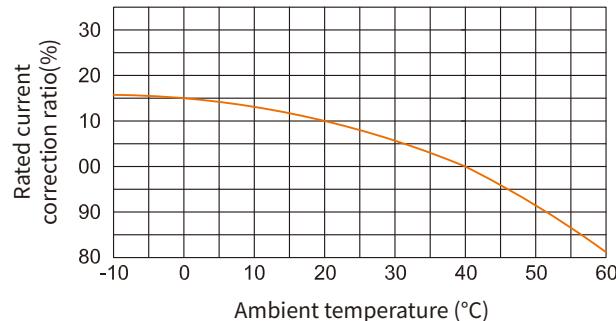

Derating of Temperature


Frame size	Ambient temperature (40°C product)														
	-10°C	-5°C	0°C	5°C	10°C	15°C	20°C	25°C	30°C	35°C	40°C	45°C	50°C	55°C	60°C
EKM8-125	1.18	1.15	1.15	1.1	1.08	1.06	1.04	1.03	1.02	1.01	1	0.977	0.957	0.936	0.915
EKM8-160	1.22	1.2	1.15	1.14	1.12	1.09	1.07	1.05	1.03	1.01	1	0.977	0.957	0.936	0.915
EKM8-250	1.2	1.18	1.15	1.13	1.11	1.09	1.08	1.07	1.05	1.02	1	0.985	0.968	0.952	0.935
EKM8-400	1.4	1.35	1.3	1.22	1.18	1.13	1.09	1.06	1.04	1.02	1	0.985	0.968	0.952	0.935
EKM8-630	1.2	1.18	1.13	1.11	1.09	1.08	1.07	1.05	1.03	1.01	1	0.985	0.968	0.952	0.935
EKM8-800	1.25	1.23	1.18	1.15	1.13	1.1	1.07	1.05	1.03	1.02	1	0.978	0.957	0.936	0.915
EKM8-1250	1.25	1.21	1.2	1.15	1.13	1.1	1.08	1.06	1.04	1.02	1	0.978	0.957	0.936	0.915
EKM8-1600	1.18	1.15	1.12	1.15	1.13	1.1	1.08	1.06	1.04	1.02	1	0.978	0.957	0.936	0.915

Note: When the ambient temperature is below 40°C, the product can be used normally, with no derating capacity.

Derating of Altitude


Altitude (m)	2000	2500	3000	4000	4500	5000
Power frequency withstand voltage (V)	2500	2500	2250	1950	1775	1625
Insulation voltage (V)	1000	1000	900	780	710	650
Maximum operational voltage (V)	400	400	350	312	284	260
Correction coefficient of operating current (In)	1	1	0.98	0.95	0.92	0.9

Overall Dimension (mm)

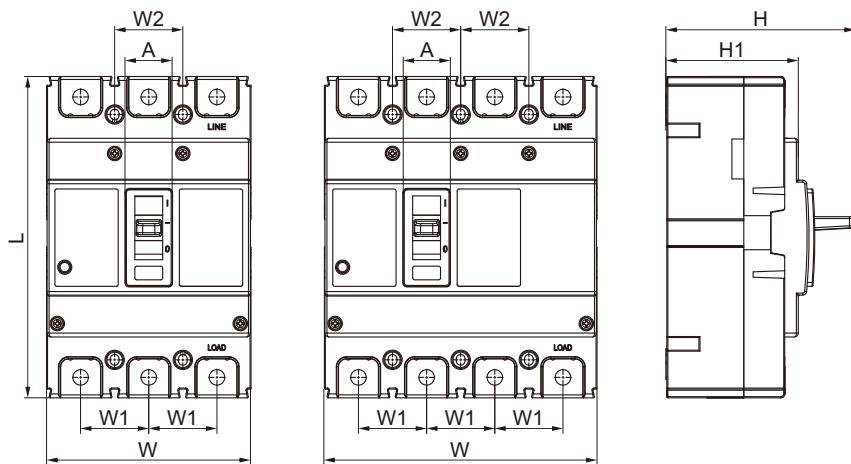


Product type	Poles	W	L	H	H1	W1	W2	A
EKM8-125	1	25	130	94.5	68	25	25	24
	2	50	130	94.5	68	25	25	24
	3	75	130	94.5	68	25	25	24
	4	100	130	94.5	68	25	25	24
EKM8-160	2	60	155	94(S)/108(H)	68(S)/82(H)	30	30	25
	3	90	155	94(S)/108(H)	68(S)/82(H)	30	30	25
	4	120	155	94(S)/108(H)	68(S)/82(H)	30	30	25
EKM8-250	3	105	165	96(S)/116(H)	68(S)/88(H)	35	35	24.4
	4	140	165	96(S)/116(H)	68(S)/88(H)	35	35	24.4
EKM8-400/630	3	140	257	152	103	44	44	51
	4	184	257	152	103	44	44	51
EKM8-800	3	210	275.5	152	103	70	70	58
	4	280	275.5	152	103	70	70	58
EKM8-1250	3	210	275.5	152	103	70	70	58
	4	280	275.5	152	103	70	70	58
EKM8-2000	3	210	340	244	141	70	70	78
	4	280	340	244	141	70	70	78

Front Connection Installation Dimension (mm)

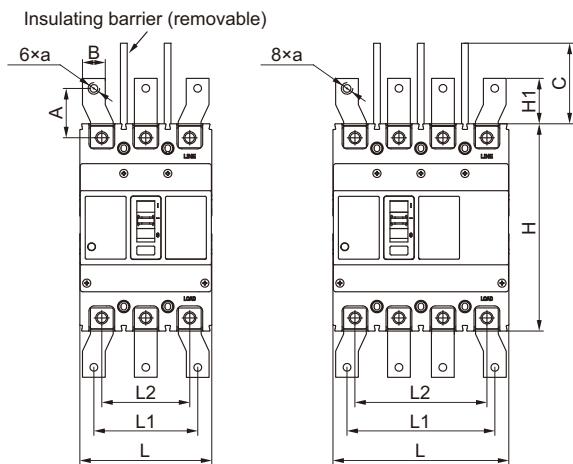


Product type	Poles	L	L1	L2	H	H1	A	B	C	a
EKM8-125	3	75	68	50	130	24	24.5	15	48	M8
	4	100	93	75	130	24	24.5	15	48	M8
EKM8-160	3	90	78	60	155	21.8	24.5	15	48(S)/64(H)	M8
	4	120	108	90	155	21.8	24.5	15	48(S)/64(H)	M8
EKM8-250	3	105	84	70	165	41.8	43.5	20	48(S)/64(H)	M8
	4	140	119	105	165	41.8	43.5	20	48(S)/64(H)	M8
EKM8-400/630	3	140	111	87	257	45.4	43	28	98	Ø14
	4	184	155	131	257	45.4	43	28	98	Ø14
EKM8-800	3	210	160	140	275.5	50.5	53	40	98	Ø13
	4	280	230	210	275.5	50.5	53	40	98	Ø13


EKM8-1250

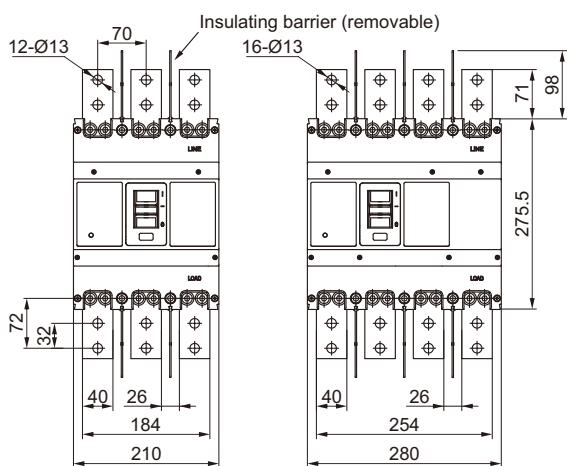

EKM8-2000

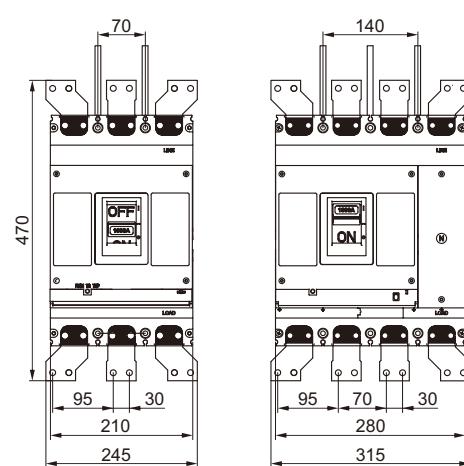


Rear Connection Installation Dimension (mm)

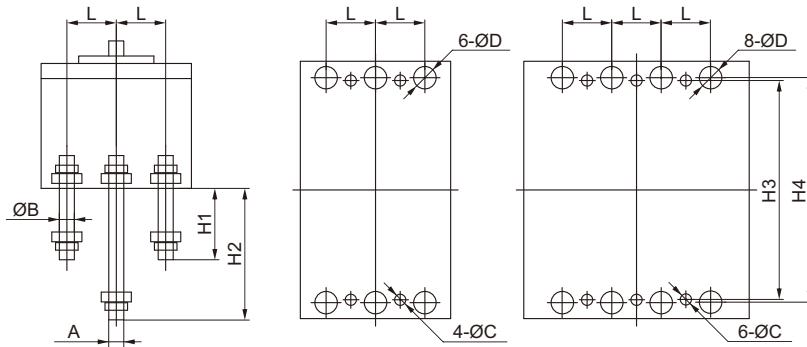


Product type	L	H1	H2	H3	H4	A	B	C	D
EKM8-125	25	51	81	110	114	M8	10	4.5	13
EKM8-160	30	49	94	132	134	M8	12	4.5	15
EKM8-250	35	82	121	126	144	M12	12	4.5	15

EKM8-400/630

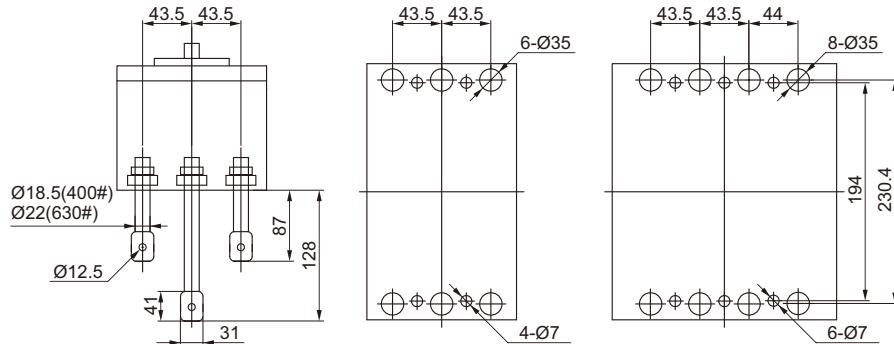


EKM8-800

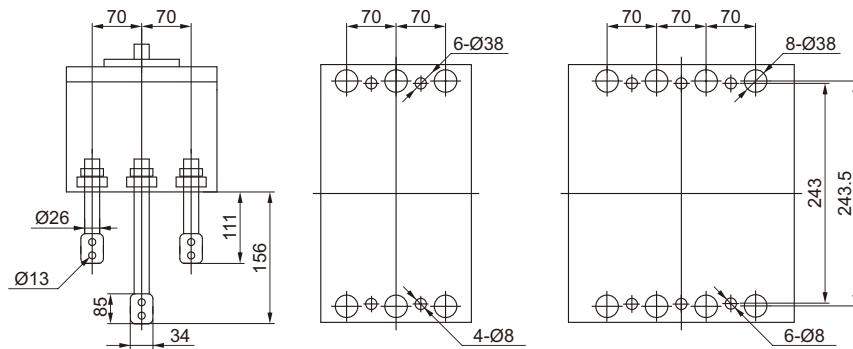


Tripping Characteristic Curve


EKM8-125 (10-50A)

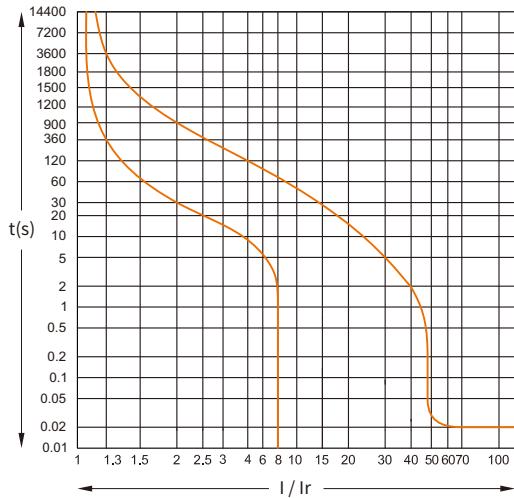

EKM8-125 (63-125A)

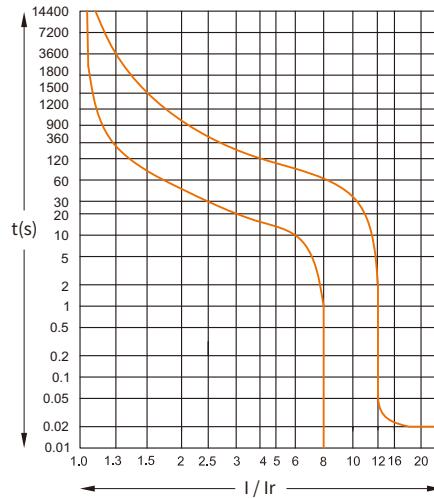


EKM8-160 (10-50A)

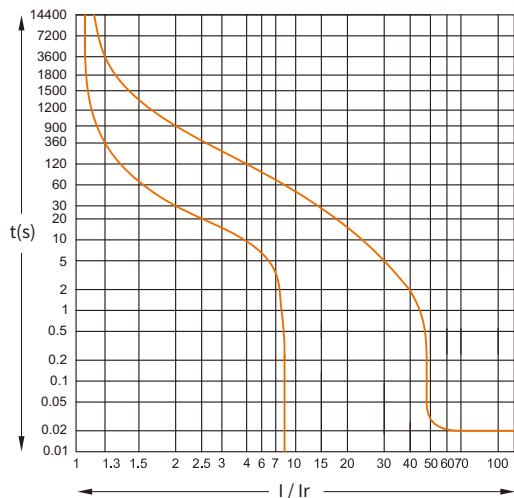


EKM8-160 (63-160A)



EKM8-250

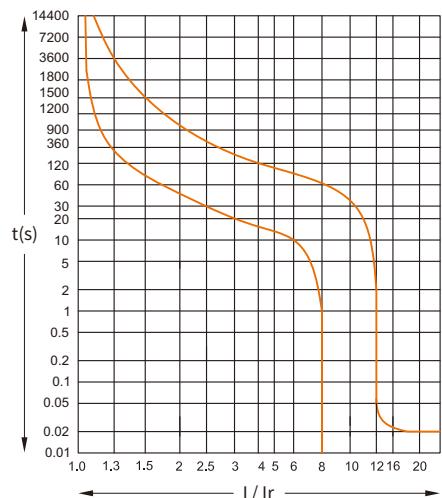

EKM8-400

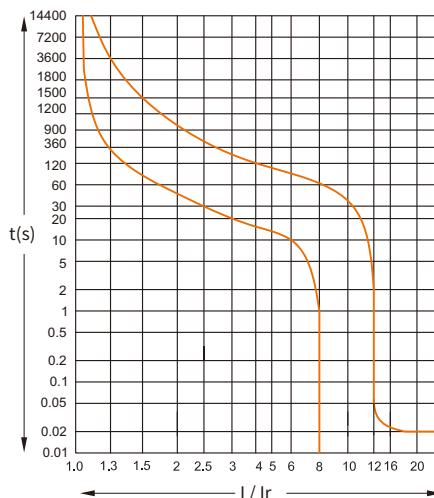


EKM8 MCCB 125AF~2000AF

ETEK®


Thermal Magnetic Fixed MCCB

Standard_ IEC60947-2

EKM8-630

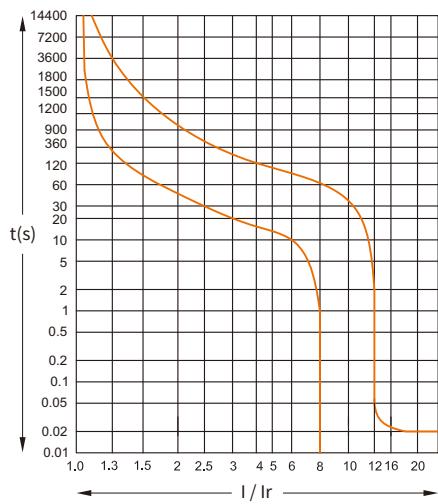

EKM8-800

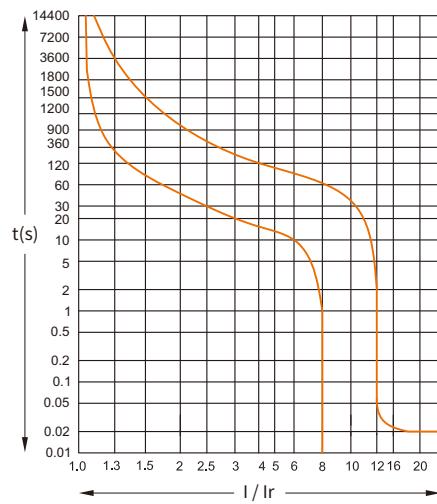

EKM8-1250/2000

